
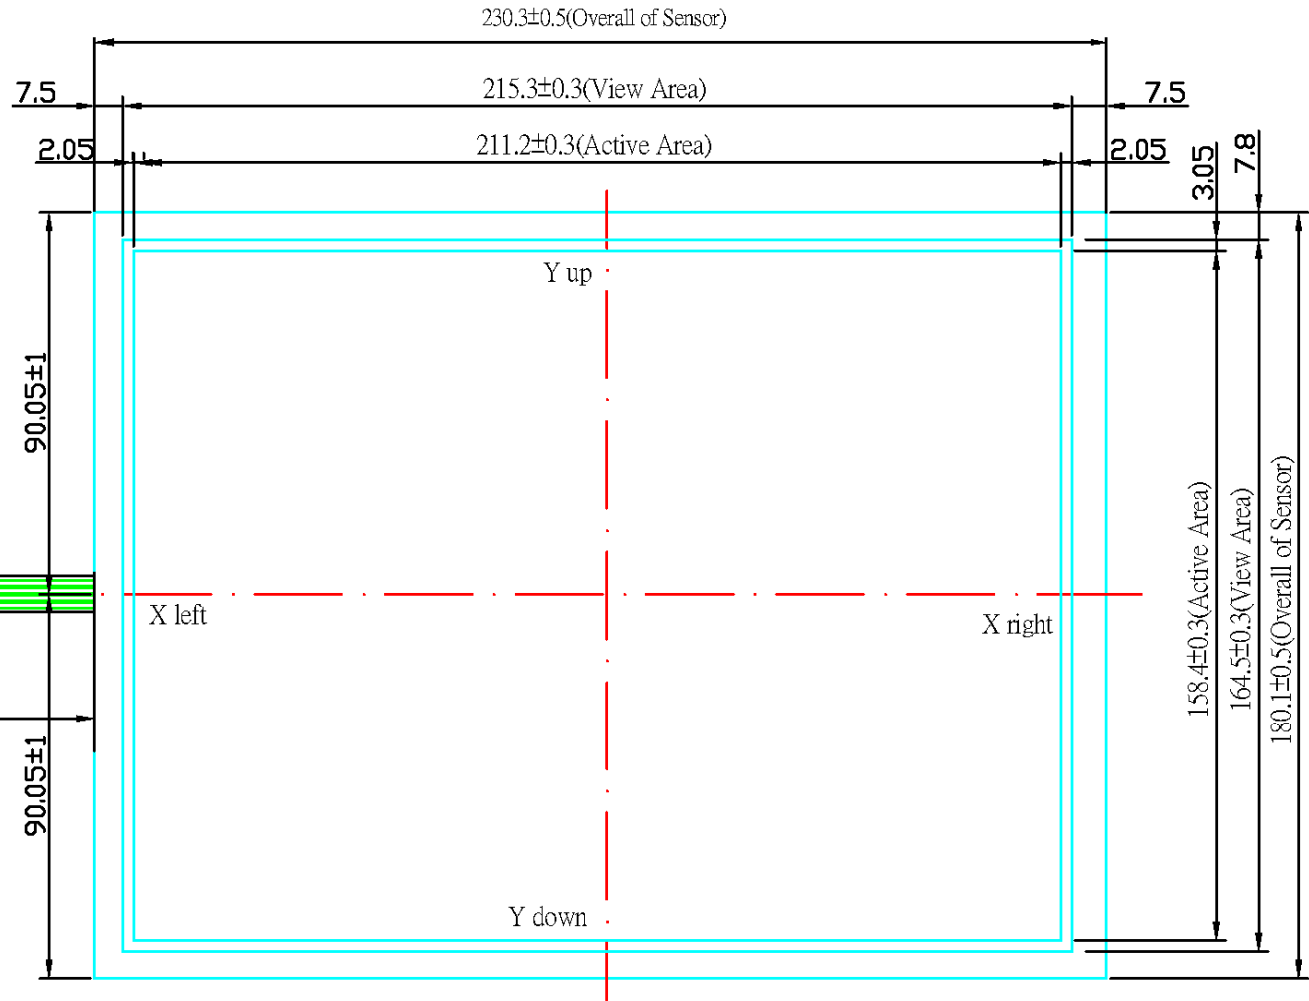



**Parameter**

- Film+Glass+FFC  
 Film : glare coating 0.188mm  
 Glass : 1.8mm
- Insulation :  $\geq 20M\Omega$  (25V DC)
- Linearity :  $\leq 1.5\%$
- Surface Hardness : 3H more

Pin#	Assignment
1	X right
2	Y up
3	X left
4	Y down

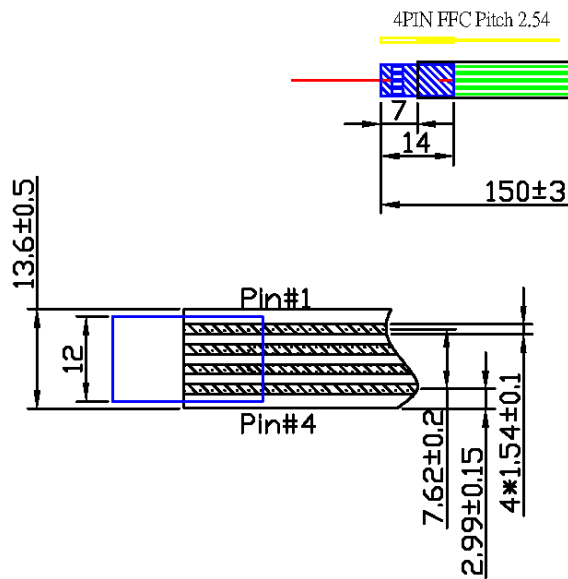

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2011/01/18	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
	MODEL :	AIM-4R-1040-O03-G1N	ANTI GLARE	General	1.1mm	1.5mm±0.2
 WWW.AIMTOUCH.COM.TW	AIM-4R-1040-O03	AIM-4R-1040-O03-G1SN	ANTI GLARE	chemical strengthen	1.1mm	1.5mm±0.2
		AIM-4R-1040-O03-G2N	ANTI GLARE	General	1.8mm	2.2mm±0.2

NOTE : All indications are the millimeters.