

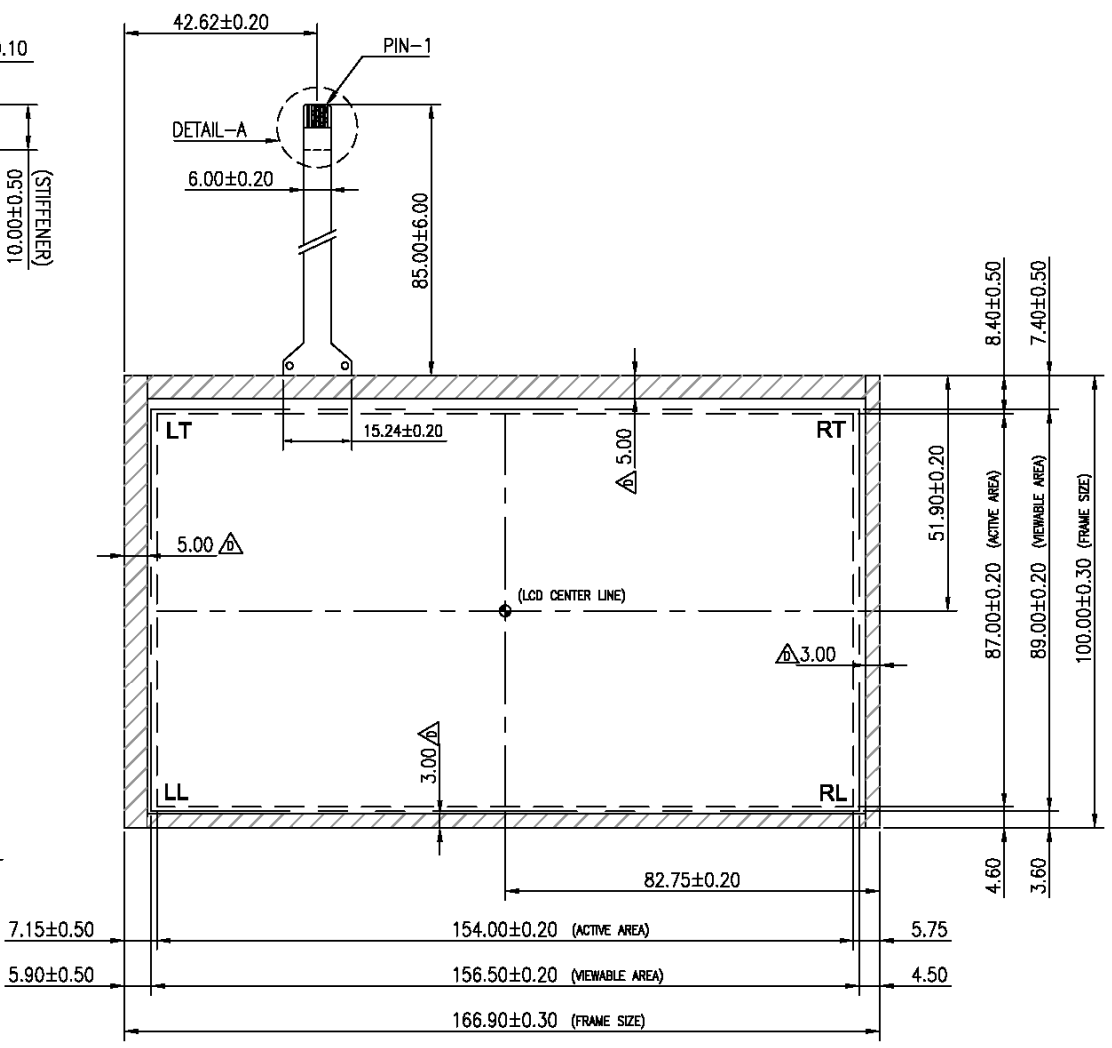


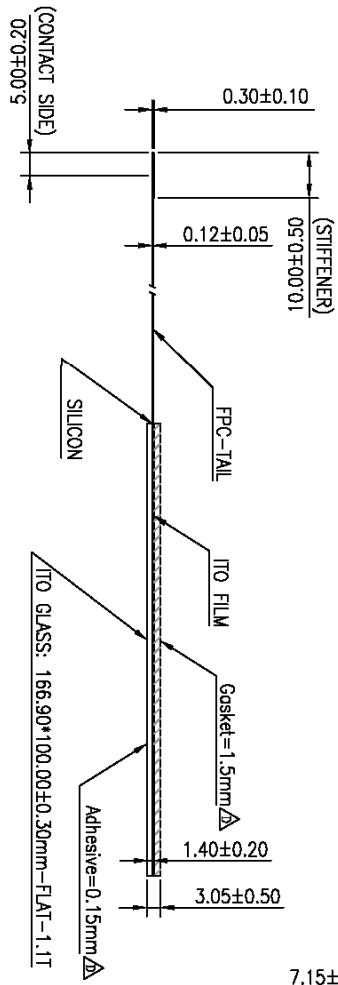

| CONNECTOR PINOUT |             |
|------------------|-------------|
| PIN NO.          | DESIGNATION |
| 1                | RL          |
| 2                | LL          |
| 3                | SG          |
| 4                | RT          |
| 5                | LT          |



|  |                            |                      |               |                             |                 |                         |
|--|----------------------------|----------------------|---------------|-----------------------------|-----------------|-------------------------|
| 瞄準科技有限公司<br>AIM TOUCH TECHNOLOGY CO.,LTD.<br> | DATE : 2006/12/22          | Part Number          | ITO Film Type | Glass Type                  | Glass Thickness | Finished Part Thickness |
|  | MODEL :<br>AIM-5R-0700-A14 | AIM-5R-0700-A14-G1N  | ANTI GLARE    | high temperature strengthen | 1.1mm           | 1.4mm±0.2               |
|   |                            | AIM-5R-0700-A14-G16N | ANTI GLARE    | chemical strengthen         | 1.6mm           | 1.9mm±0.2               |
|  |                            | AIM-5R-0700-A14-G2N  | ANTI GLARE    | high temperature strengthen | 1.85mm          | 2.2mm±0.2               |

NOTE : All indications are the millimeters.